

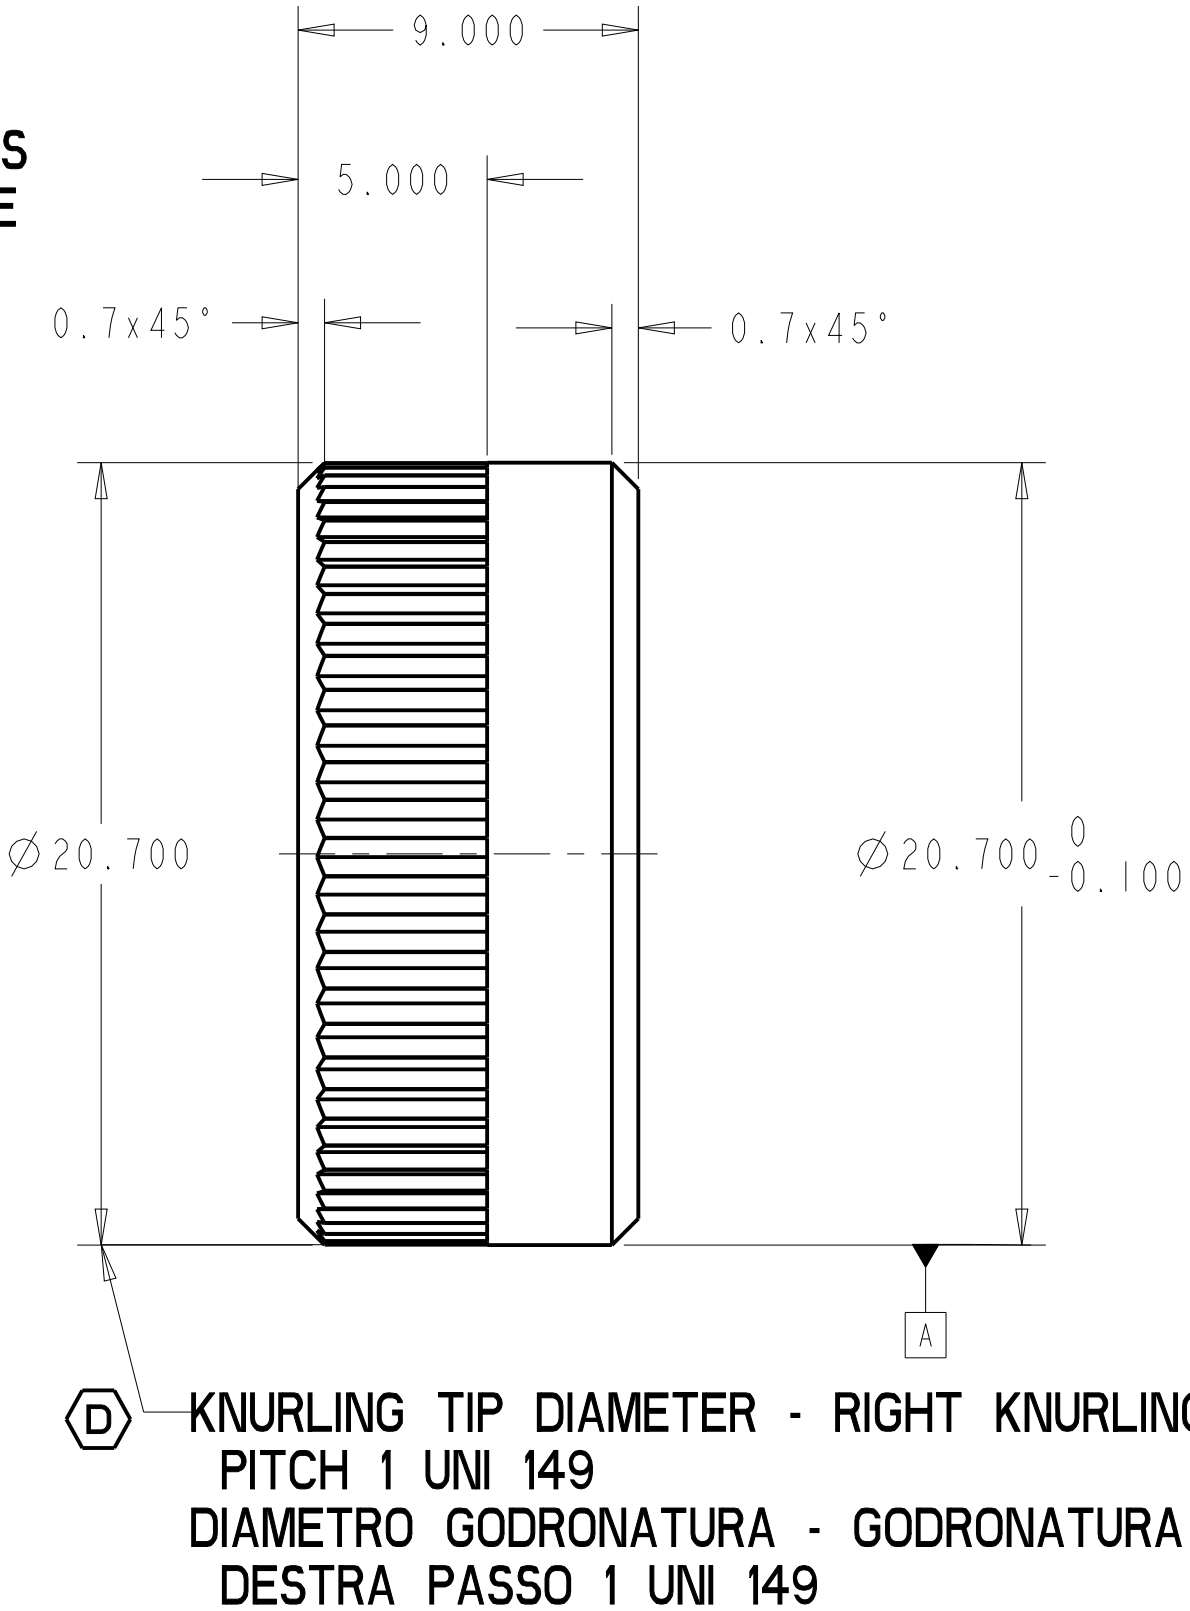


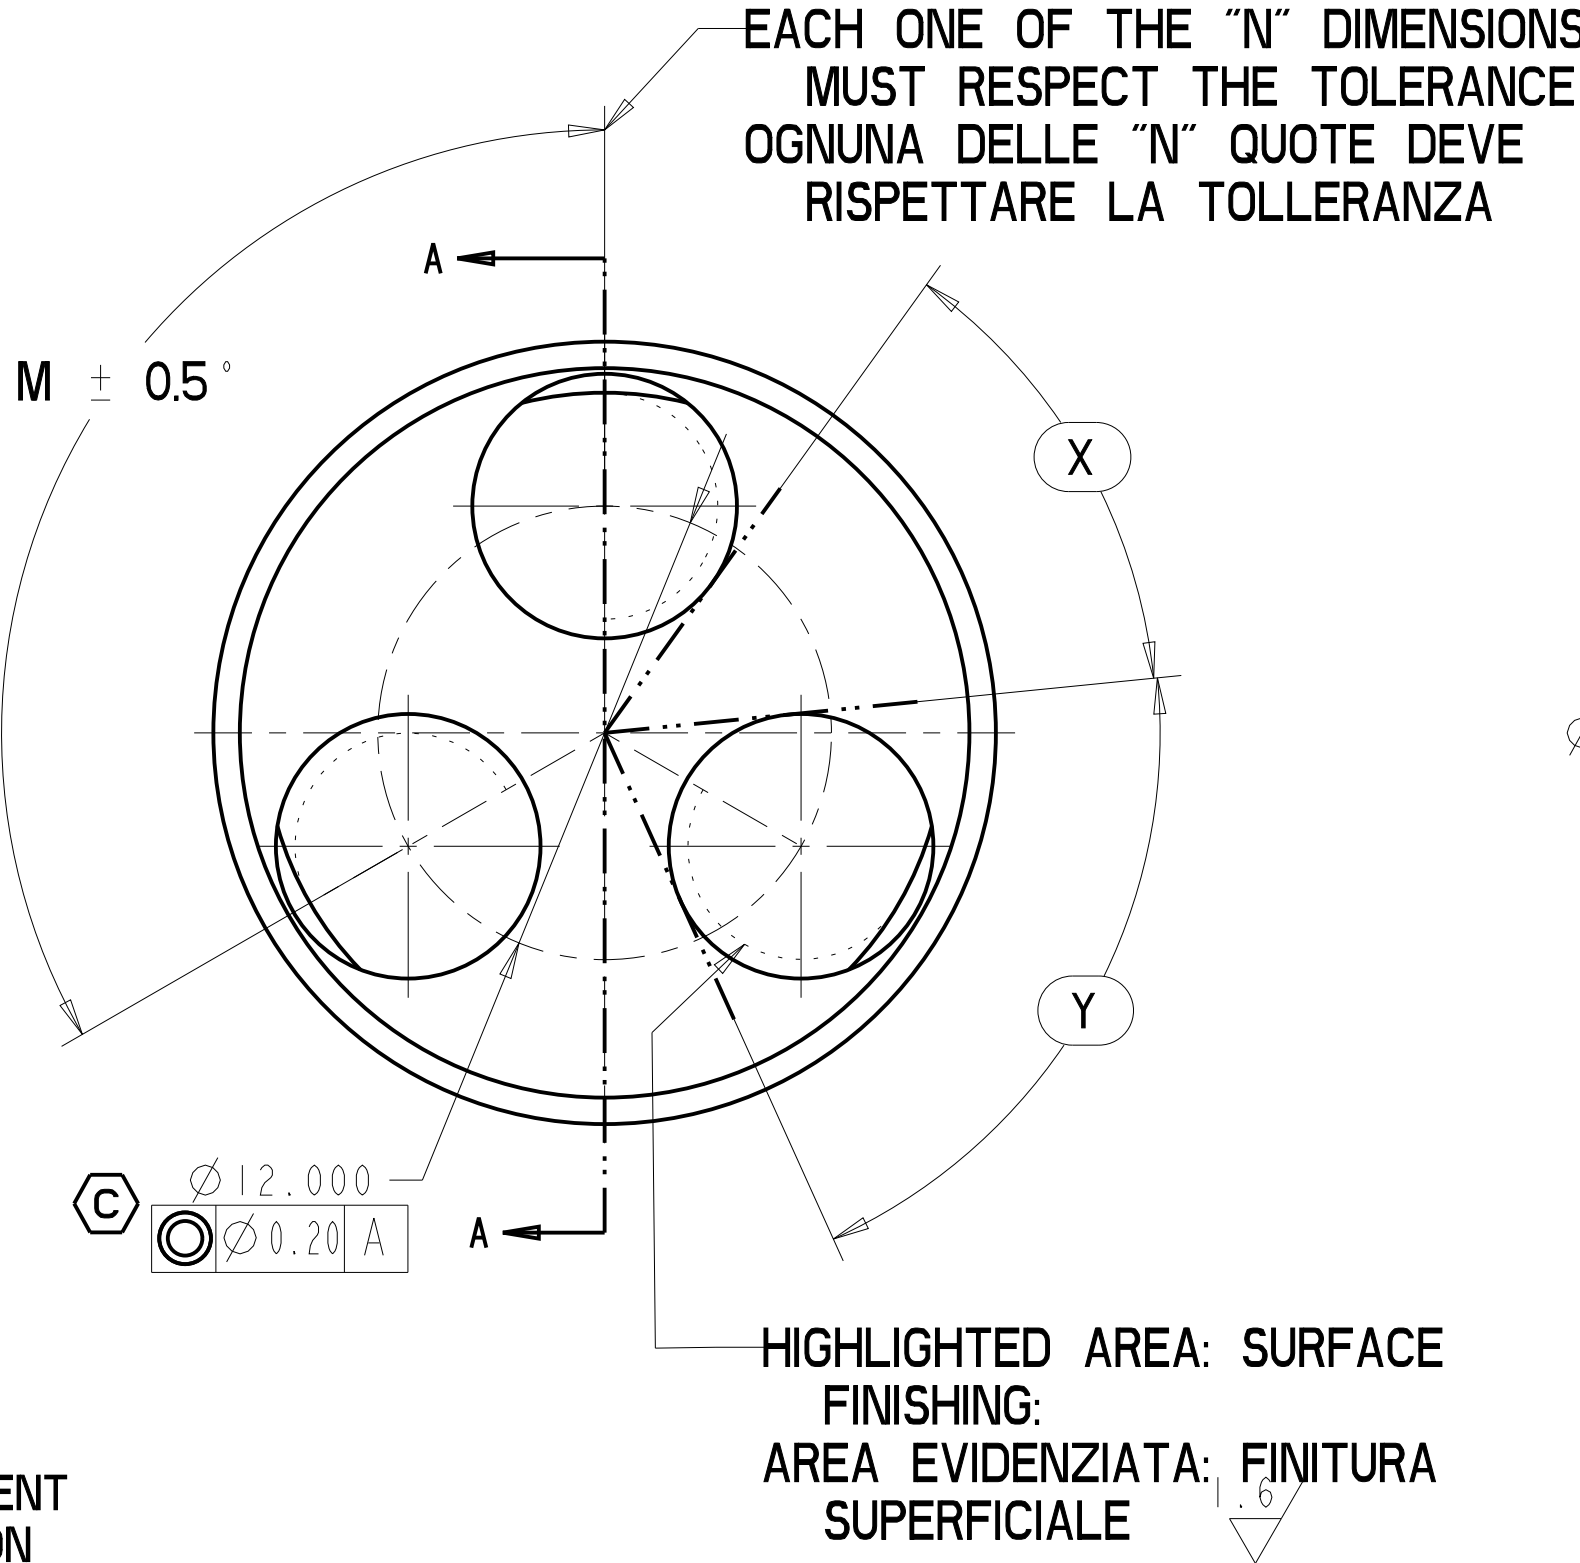

REVISION	BY	DATE	APPD BY	DATE	PCN #	DESCRIPTION
D	MZ	02/11/17	MZ	02/11/17	I	KNURLING NOTE UPDATED

REF.	DESCRIPTION	P/N	N	M	X	Y	NOTES
01	3HOLES ENTRAINEUR	A.402-04	L0205310	3	120°	44.42°-53.01°	67.01°-76.25°
02	4 HOLES ENTRAINEUR	A.402-04a	/	4	90°	15.59°-21.84°	67.01°-76.25°



MAI USATO - NEVER USED

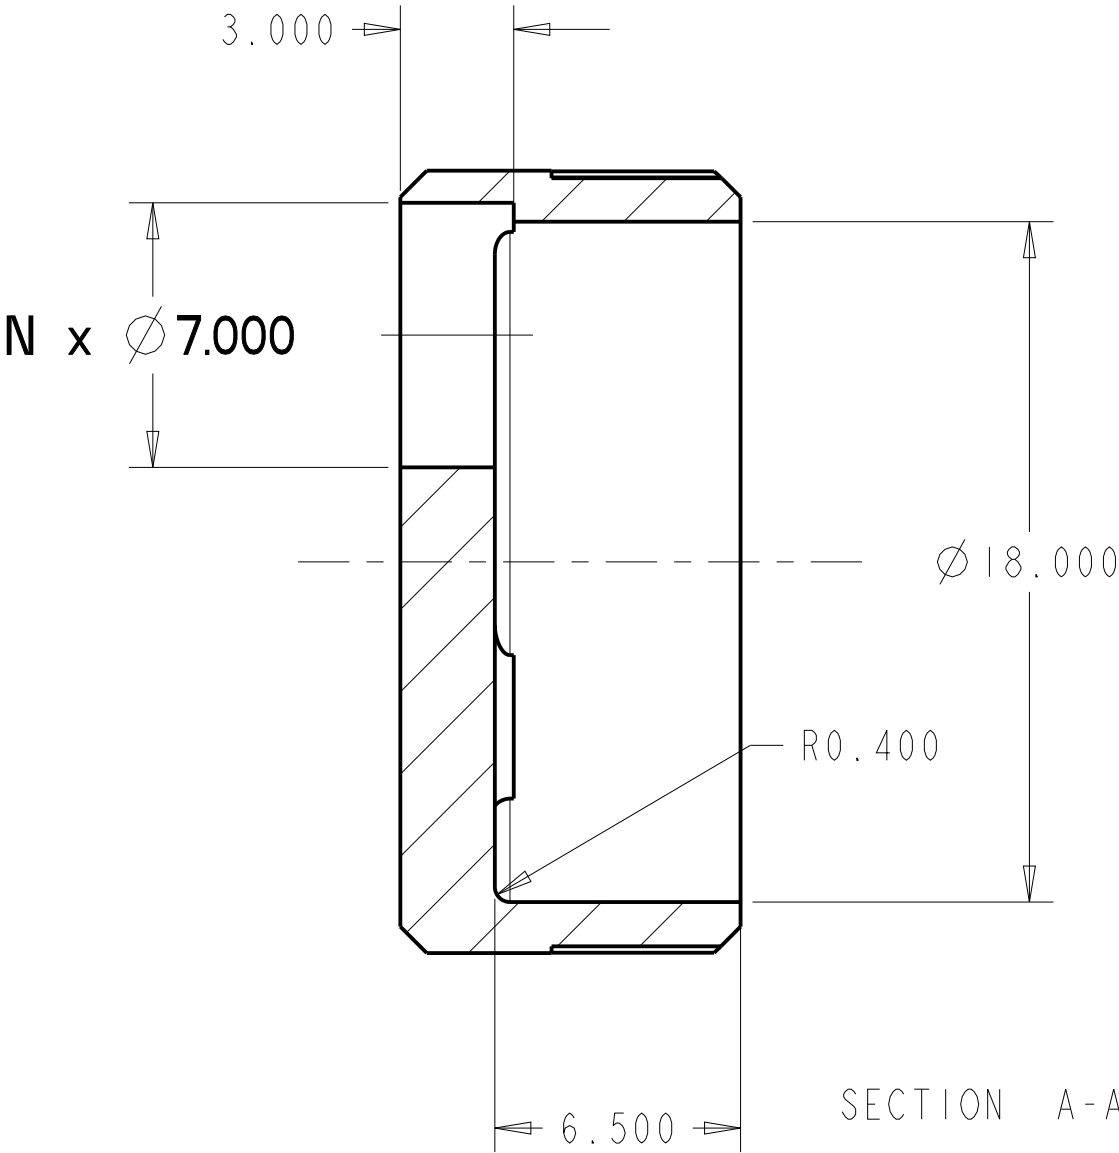

THE PRESENCE OF CALAMINE DUE TO THE HEAT TREATMENT MUST NOT AFFECT THE ROUGHNESS VALUE PRESCRIBED ON THE Ø7 HOLES  
LA PRESENZA DI CALAMINA DOVUTA AL TRATTAMENTO TERMICO SUI FORI Ø7 NON DEVE ALTERARE LA RUGOSITA' PRESCRITTA

X,Y: MEASURED FROM THE A DIAMETER AXIS  
X,Y: MISURATE DALL'ASSE DEL DIAMETRO A

BURRS NOT ALLOWED  
BAVE NON AMMESSE

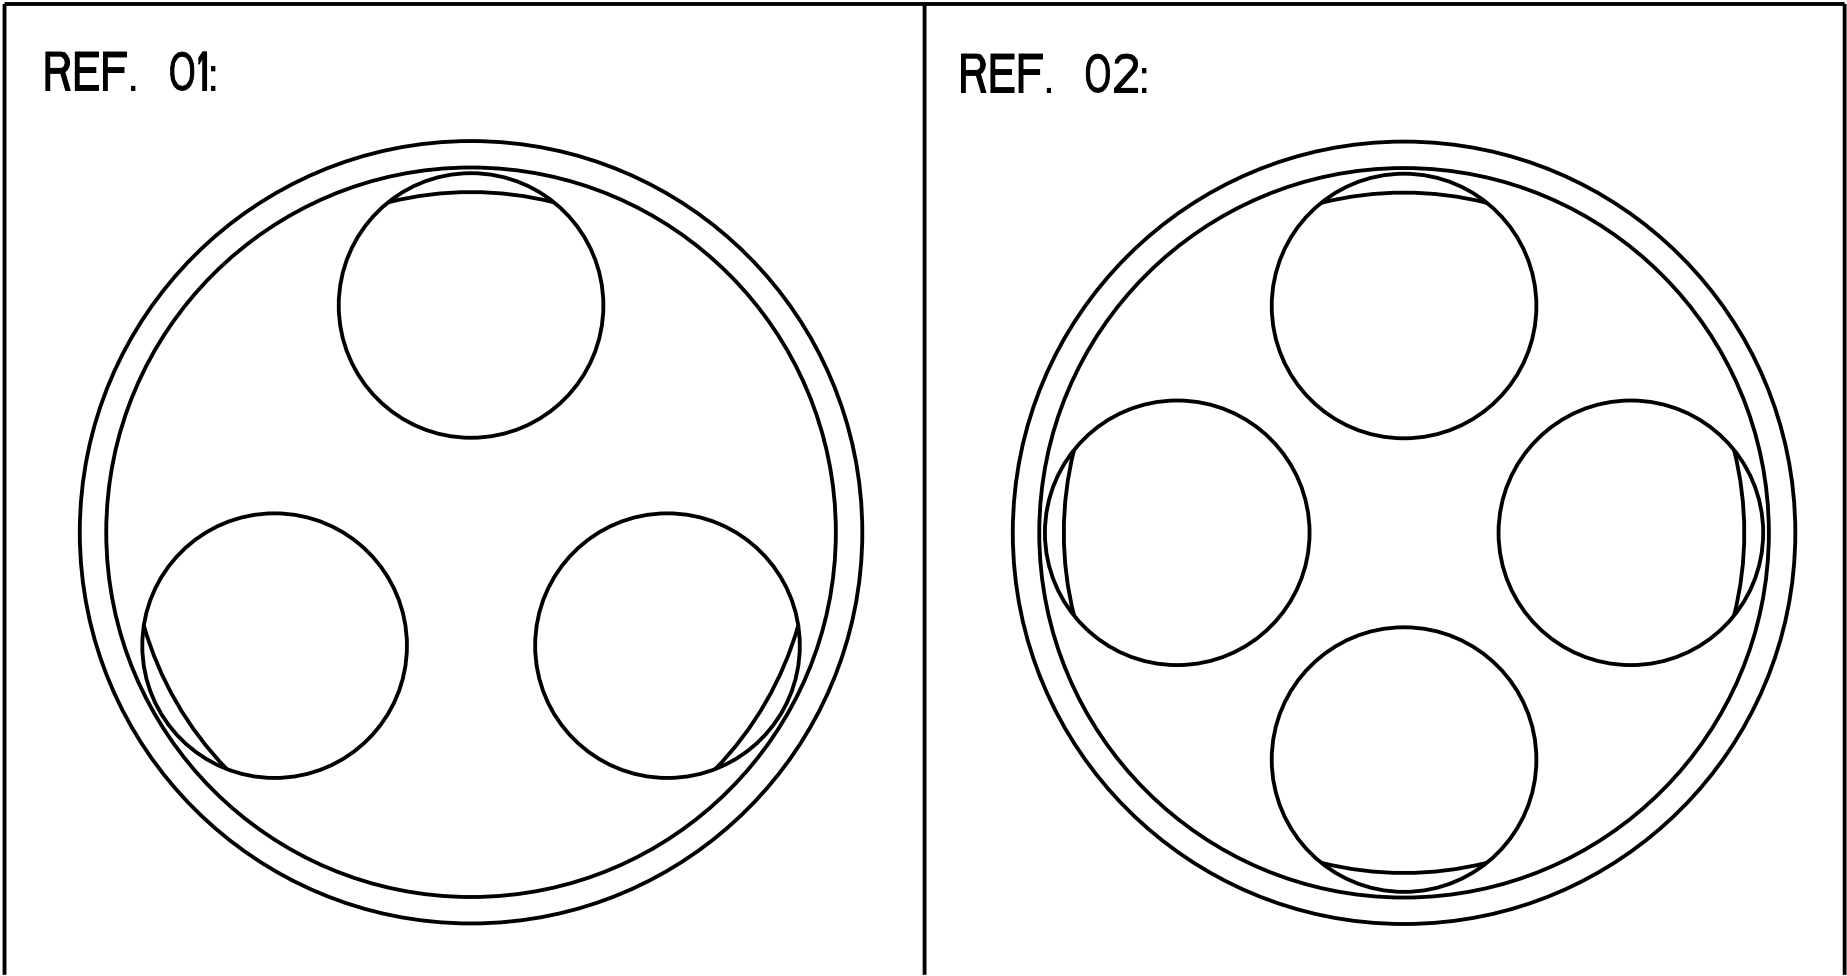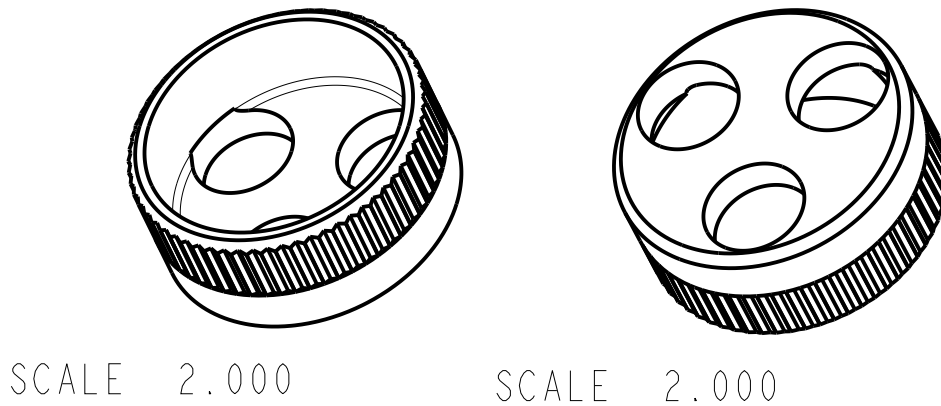

3.2 / ( 1.6 )

<b>StanleyBlack&amp;Decker</b>						CONFIDENTIAL - This document and all information contained herein is the property of Stanley Black & Decker and may not be disclosed to unauthorized persons or reproduced by any means, or used for any purpose other than that submitted without express written permission from Stanley Black & Decker.					
<b>INDUSTRIAL &amp; AUTOMOTIVE REPAIR</b>											
Tolerances: (except as noted)		Drawn by: MZ		Date: 17/01/14		Appd By:		Date:		Scale (except as noted): 5.000	
± 0.1		Material: 42 CD 4		Hardness: 49-53 HRC		Finish:					
Project Number:										ENTRAINEUR A.402	
Part Number: SEE TABLE		Drawing Number: A 402-04 D		Size: A2		Revision: D		Sheet: 1 OF 1			